

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ChiliTec GmbH

Supplier's address: Technik, Bäckerberg 12, 38165 Lehre, DE

Model identifier: 21221

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	480 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,440	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	2	Survival factor	0,50	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,9	Stroboscopic effect metric (SVM)	0,5	

(a) - : not applicable;

(b) - : not applicable;

Product Mark

Product Type :21221 A60-5W-3000K


Manufacturer :YX

Temperature :nc'C

Humidity :65%

Operator :PAN

Test Date :2021-07-28 14:41:18

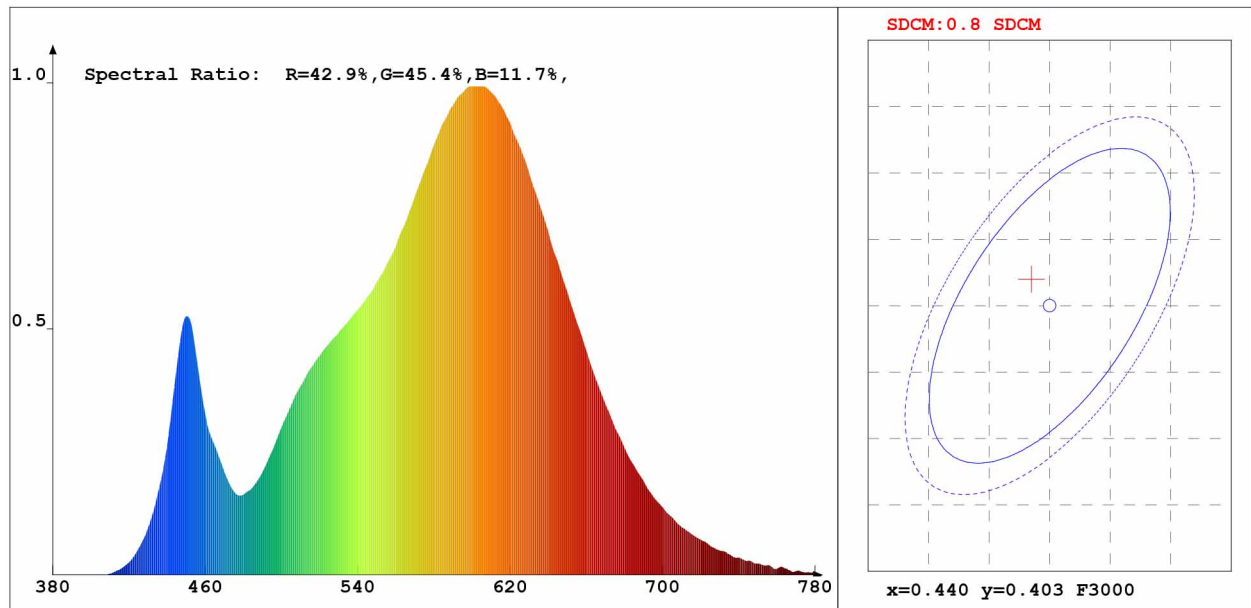

Chroma Parameters

Chro.Coord.:x=0.4385 y=0.4020 u=0.2524 v=0.3472 duv=-0.0010

CCT: 2958K Dominant Wave.:583.4nm Purity:52.3%

Flux RGB Ratio:R=23.0%,G=75.5%,B=1.5% Peak Wave:601.6nm Half Width:124.2nm