

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LEDVANCE

Supplier's address: LEDVANCE GmbH, Parkring 33, Garching, Germany

Model identifier: AC32472

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected source (CLS):	No
Colour-tunable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value	
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G	
Useful luminous flux (Φ _{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	150 lm Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1800	
On-mode power (P _{on}), expressed in W	4,0	Standby power (P _{stb}), expressed in W and rounded to the second decimal	0,00	
Networked standby power (P _{nw}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80	
Outer dimensions without	Height	168	Spectral power distribution in the	See image in last page
	Width	124		
	Depth	124		

Page 1 of 1


Page 1 / 2

separate control gear, lighting control parts and non-lighting control parts, if (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(B)	Yes	If yes, equivalent power (W)	16	
		Chromaticity coordinates (x and y)	0,549	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,90	
the lumen maintenance factor	0,70			
Parameters for LED and OLED mains light sources:				
displacement factor (cos φ1)	0,40	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage	-. ^(B)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

^(B) '-': not applicable;

^(B) '-': not applicable;

Page 2 / 3

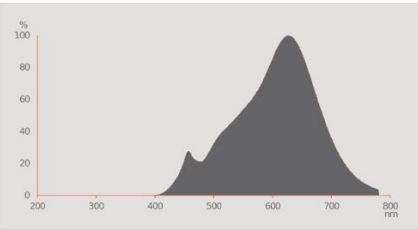

Page 3 / 3