Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Twinkly

Supplier's address: Info Twinkly, Via Tortona 37, 20144 Milano, IT

Model identifier: TWF020STP-BUK

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Wire		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers


Product parameters

Parameter Parameter Value Value General product parameters: Energy consumption in on-15 Energy efficiency G mode (kWh/1000 h), rounded class up to the nearest integer Useful luminous flux (duse), 40 in Sphere Correlated colour 20 670 indicating if it refers to the flux (360°) temperature, in a sphere (360°), in a wide rounded to the cone (120º) or in a narrow cone nearest 100 Κ, (90º) or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set On-mode (P_{on}), 15,0 Standby power (P_{sb}), 0,46 power expressed in W expressed in W and rounded to the second decimal Networked standby power (P_{net}) 0,46 Colour rendering 35 index, rounded to for CLS. expressed in W and rounded to the second decimal the nearest integer, or the range of CRIvalues that can be set Outer Height 10 000 Spectral power See image dimensions distribution in the in last page 50 Width

without separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)	Depth	30	range 250 nm to 800 nm, at full-load			
Claim of equival	ent power ^(a)	-	lf yes, equivalent power (W)	-		
			Chromaticity	0,259		
			coordinates (x and y)	0,253		
Parameters for LED and OLED light sources:						
R9 colour rende	ring index value	0	Survival factor	0,90		
the lumen main	tenance factor	0,93				
(a)		•				

(a)'-' : not applicable;

(b)'-' : not applicable;

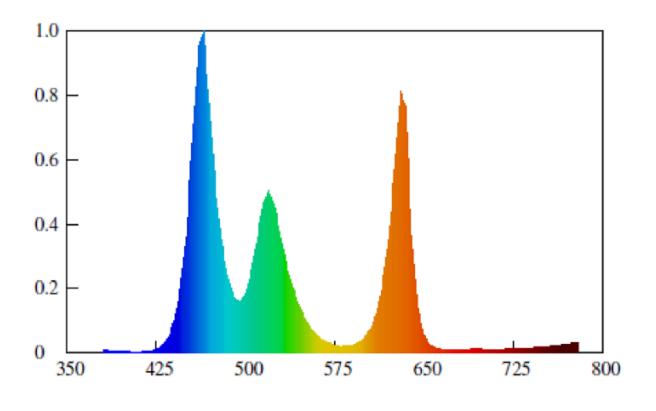

(All on mode)